

BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module:

LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum


LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum

Code: 09598 (page 83)

FirestayLED

Integrated LED Fixed Downlight


- IP65
- 30/60/90 minutes certified firestay
- Part B / C / E compliant
- White bezel & magnetic satin bezel
- Part L compliant

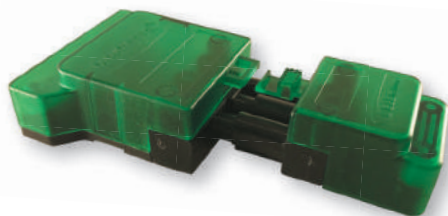

Easy Fit Magnetic Bezel



Includes BELL Quick Fix Connector - Plug & Play Fitting
Loop in / loop out terminals. Quick release connector for ease of insulation resistance testing.



Code	Description	Colour Temperature	lm	cd	Beam ^o	Hrs
10500	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Warm White 3000K	580	1050	40 ^o	35000
10501	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Cool White 4000K	595	1200	40 ^o	35000
10502	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Daylight 6000K	610	1150	40 ^o	35000
10503	Magnetic Chrome Bezel	-	-	-	-	-
10504	Magnetic Brass Bezel	-	-	-	-	-
09598	BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module	-	-	-	-	-
08197	BELL Quick Fix Connector	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlight	-	-	-	-	-

Technical Helpline +44 (0)1924 893380




¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)

www.bellighting.co.uk

Technical Specification

Data	
Construction	Aluminium
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

10500 6W

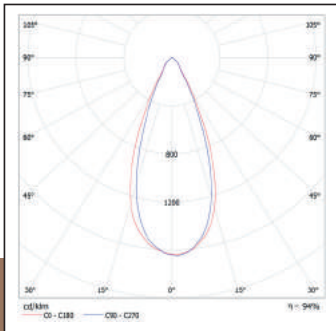

10500/1/2

